



6 5 4 3 2 1

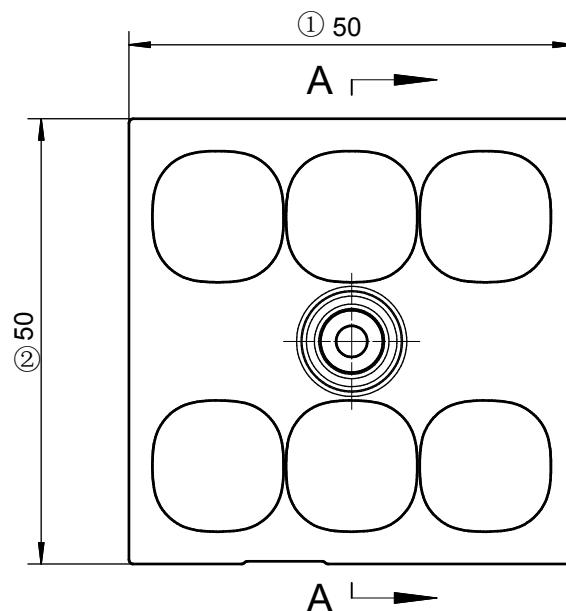

A-A

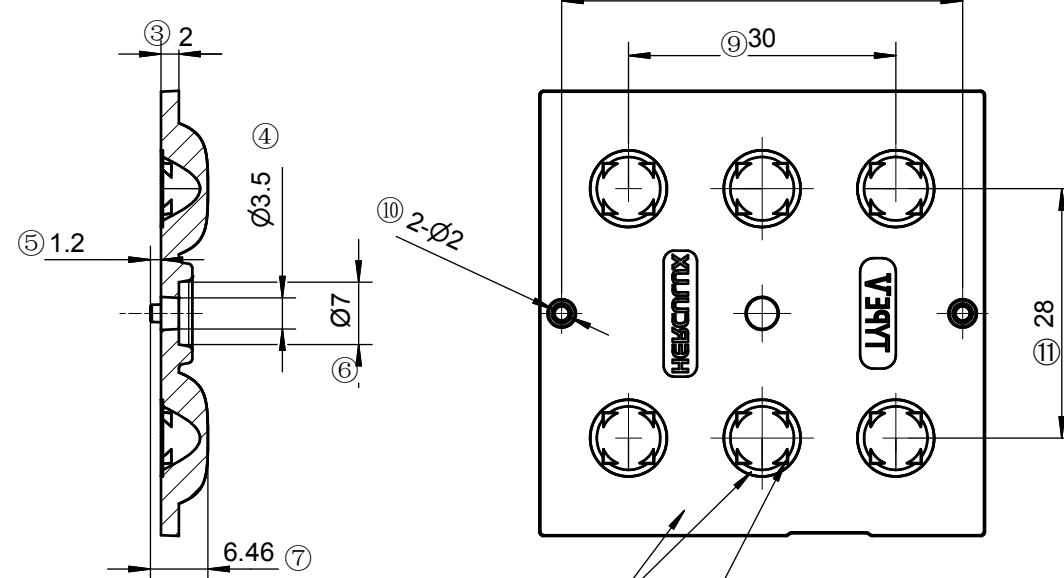

指定面为磨砂面
The specified surface
is a frosted surface

指定面为磨砂面
The specified surface
is a frosted surface

技术要求:
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。

3、表面无飞边，缩水，气泡等缺陷。

*4、灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度：Ra<3.2μm

Technical remark:

1. Fillet and inclination not indicated according to 3D drawing.

2. Dimensional tolerances not indicated are shown in the right list.

3. The surface has no flash, shrinkage, bubbles and other defects.

*4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

基本尺寸	公差值								
Basic size	Tolerance value	2					4		
<3	±0.1	1					3		
3~10	±0.15								
10~24	±0.20								
24~65	±0.35	序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature	序号 Item	更改标记 Change mark	更改内容 Change content
65~140	±0.50								
140~250	±0.80	光 学 设 计 Optical design					更改日期 Change date	签 名 Signature	
250~450	±1.2	结 构 设 计 Structural design							
>450	±2.0	审 核 Verify							
		审 定 Approval					材料 Material:	PC	CDHK

Title: HK 矩阵6合1-TYPE V 路灯透镜 HK Matrix 6 in 1-TYPE V street lamp lens	Drawing No. HK-50@06-150-5050-#0-1g-6
Part No. 1.02.23078	